


TEMPO®



Tempo shown with Tuscan Sun shell

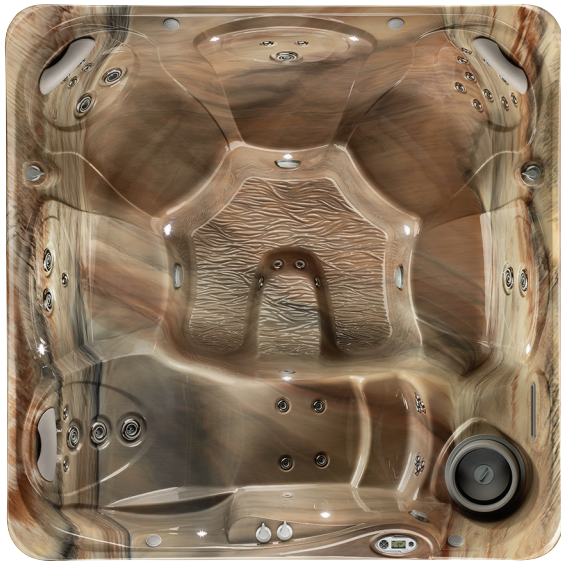

*Tempo shown with Tuscan Sun shell/
Espresso cabinet and Everwood® step*

Seating Capacity	6 adults
Dimensions	7'5" x 7'5" x 39"/2.26m x 2.26m x .99m
Water Capacity	415 gallons/1,575 liters
Weight	910 lbs./415 kg dry; 5,420 lbs./2,470 kg filled*
Spa Shell Options	Pearl, Sterling Marble, Tuscan Sun or Desert
Cabinet Options	Coastal Gray, Espresso, Teak
Jets - 45 (all with stainless steel trim)	6 Directional Hydromassage jets 4 Rotary Hydromassage jets 35 Directional Precision® jets
Waterfall	Included
Jet Pump 1	Wavemaster® 9200; Two-speed, 2.5 HP Continuous Duty, 5.2 HP Breakdown Torque
Jet Pump 2	Wavemaster® 9000; One-speed, 2.5 HP Continuous Duty, 5.2 HP Breakdown Torque
Ozone System (Optional)	FreshWater® III Corona Discharge
Control System	IQ 2020® 230v/50 amp, 60 Hz Includes G.F.C.I. protected sub-panel
Lighting	10 multi-color LED points of light, dimmable
Heater	No-Fault® 4000w/230v
Energy Efficiency	FiberCor® Insulation; Certified to the APSP 14 National Standard and the California Energy Commission (CEC) in accordance with California law
Effective Filtration Area	65 sq. ft., top loading
Vinyl Cover	3.5" to 2.5" tapered, 2 lb. density foam core Ash, Caramel or Espresso
Cover Lifter (Optional)	CoverCradle®, CoverCradle II, Lift 'n Glide® or UpRite®
Steps (Optional)	Everwood® or Polymer Coastal Gray, Espresso or Teak
Entertainment (Optional)	Wireless Sound System

* Includes water and 6 adults weighing 175 lbs. each; Export models available in 240v, 50Hz, 2000w heater

From the makers of



RHYTHM®



Rhythm shown with Pearl shell



*Rhythm shown with Pearl shell/
Coastal Gray cabinet and Polymer step*

Seating Capacity	7 adults
Dimensions	7' x 7' x 36.75" /2.13m x 2.13m x .93m
Water Capacity	345 gallons /1,300 liters
Weight	835 lbs. /380 kg dry; 4,765 lbs. /2,160 kg filled*
Spa Shell Options	Pearl, Sterling Marble, Tuscan Sun or Desert
Cabinet Options	Coastal Gray, Espresso, Teak
Jets - 35 (all with stainless steel trim)	5 Directional Hydromassage jets 3 Rotary Hydromassage jets 27 Directional Precision® jets
Waterfall	Included
Jet Pump 1	Wavemaster® 6200; Two-speed, 1.5 HP Continuous Duty, 3.2 HP Breakdown Torque
Jet Pump 2	Wavemaster® 6000; One-speed, 1.5 HP Continuous Duty, 3.2 HP Breakdown Torque
Ozone System (Optional)	FreshWater® III Corona Discharge
Control System	IQ 2020® 230v/50 amp, 60 Hz Includes G.F.C.I. protected sub-panel
Lighting	10 multi-color LED points of light, dimmable
Heater	No-Fault® 4000w/230v
Energy Efficiency	FiberCor® Insulation; Certified to the APSP 14 National Standard and the California Energy Commission (CEC) in accordance with California law
Effective Filtration Area	65 sq. ft., top loading
Vinyl Cover	3.5" to 2.5" tapered, 2 lb. density foam core Ash, Caramel or Espresso
Cover Lifter (Optional)	CoverCradle®, CoverCradle II, Lift 'n Glide® or UpRite®
Steps (Optional)	Everwood® or Polymer Coastal Gray, Espresso or Teak
Entertainment (Optional)	Wireless Sound System

* Includes water and 6 adults weighing 175 lbs. each; Export models available in 240v, 50Hz, 2000w heater

From the makers of



RELAY®



Relay shown with Pearl shell



Relay shown with Pearl shell/
Espresso cabinet and Polymer step

Seating Capacity	6 adults
Dimensions	7' x 7' x 36.75"/2.13m x 2.13m x .93m
Water Capacity	345 gallons/1,300 liters
Weight	835 lbs./380 kg dry; 4,765 lbs. 2,160 kg filled*
Spa Shell Options	Pearl, Sterling Marble, Tuscan Sun or Desert
Cabinet Options	Coastal Gray, Espresso, Teak
Jets - 35 (all with stainless steel trim)	5 Directional Hydromassage jets 3 Rotary Hydromassage jets 27 Directional Precision® jets
Waterfall	Included
Jet Pump 1	Wavemaster® 6200; Two-speed, 1.5 HP Continuous Duty, 3.2 HP Breakdown Torque
Jet Pump 2	Wavemaster® 6000; One-speed, 1.5 HP Continuous Duty, 3.2 HP Breakdown Torque
Ozone System (Optional)	FreshWater® III Corona Discharge
Control System	IQ 2020® 230v/50 amp, 60 Hz Includes G.F.C.I. protected sub-panel
Lighting	10 multi-color LED points of light, dimmable
Heater	No-Fault® 4000w/230v
Energy Efficiency	FiberCor™ Insulation; Certified to the APSP 14 National Standard and the California Energy Commission (CEC) in accordance with California law
Effective Filtration Area	65 sq. ft., top loading
Vinyl Cover	3.5" to 2.5" tapered, 2 lb. density foam core Ash, Caramel or Espresso
Cover Lifter (Optional)	CoverCradle®, CoverCradle II, Lift 'n Glide® or UpRite®
Steps (Optional)	Everwood® or Polymer Coastal Gray, Espresso or Teak
Entertainment (Optional)	Wireless Sound System

* Includes water and 6 adults weighing 175 lbs. each
Export models available in 240v, 50Hz, 2000w heater

From the makers of



SX

HOT SPOT



SX shown with Pearl shell



SX shown with Pearl shell/
Coastal Gray cabinet and Polymer step

Seating Capacity	3 adults
Dimensions	6' x 6' x 33"/1.83m x 1.83m x .84m
Water Capacity	285 gallons/1,075 liters
Weight	720 lbs./325 kg dry; 3,620 lbs./1,640 kg filled*
Spa Shell Options	Pearl or Desert
Cabinet Options	Coastal Gray, Espresso, Teak
Jets - 17	1 Moto-Massage® jet 16 Directional Precision® jets
Waterfall	n/a
Jet Pump 1	Wavemaster® 6200; Two-speed 1.5 HP Continuous Duty, 3.2 HP Breakdown Torque
Jet Pump 2	n/a
Circulation Pump (Optional)	SilentFlo 5000®
Ozone System (Optional)	FreshWater® III Corona Discharge
Control System	IQ 2020® 115v/20 amp** (Includes G.F.C.I. protected power cord or 115v/30amp*** or 220v/50amp***, 60Hz)
Lighting	Blue LED light, dimmable; Splendors® multi-colored LED light, dimmable (optional)
Heater	No-Fault® 1000w/115v
Energy Efficiency	FiberCor® Insulation; Certified to the APSP 14 National Standard and the California Energy Commission (CEC) in accordance with California law
Effective Filtration Area	30 sq. ft., top loading
Vinyl Cover	3" to 2" tapered, 1 lb. density foam core Ash, Caramel or Teak
Cover Lifter (Optional)	CoverCradle®, CoverCradle II, Lift 'n Glide®
Steps (Optional)	Everwood® or Polymer Coastal Gray, Espresso or Teak
Entertainment (Optional)	Wireless Sound System

* Includes water and 3 adults weighing 175 lbs.each

** Requires a dedicated circuit supplied to the unit at all times. Electrical requirements will vary outside the U.S.

*** G.F.C.I. protected sub-panel required in 30amp conversion or 220v mode
Export models available in 230v, 50Hz, 1000w Heater

From the makers of



TX

HOT SPOT



TX shown with Pearl shell

TX shown with Pearl shell/
Espresso cabinet

Seating Capacity	2 adults
Dimensions	5'8.5" x 5'8.5" x 29"/1.74m x 1.74m x .74m
Water Capacity	140 gallons/525 liters
Weight	525 lbs./240 kg dry; 2,045 lbs./925 kg filled*
Spa Shell Options	Pearl or Desert
Cabinet Options	Coastal Gray, Espresso, Teak
Jets - 10	1 Moto-Massage® jet 1 Rotary Hydromassage jet 8 Directional Precision® jets
Waterfall	n/a
Jet Pump 1	Wavemaster® 4200; Two-speed, 1.0 HP Continuous Duty, 1.7 HP Breakdown Torque
Jet Pump 2	n/a
Circulation Pump (Optional)	SilentFlo 5000®
Ozone System (Optional)	FreshWater® III Corona Discharge
Control System	IQ 2020® 115v/20 amp** (Includes G.F.C.I. protected power cord) or 115v/30amp*** or 220v/50amp***, 60Hz
Lighting	Blue LED light, dimmable; Splendors® multi-colored LED light, dimmable (optional)
Heater	No-Fault® 1000w/115v
Energy Efficiency	FiberCor® Insulation; Certified to the APSP 14 National Standard and the California Energy Commission (CEC) in accordance with California law
Effective Filtration Area	30 sq. ft., top loading
Vinyl Cover	3" to 2" tapered, 1 lb. density foam core Ash, Caramel or Espresso
Cover Lifter (Optional)	n/a
Steps (Optional)	Everwood® or Polymer Coastal Gray, Espresso or Teak
Entertainment (Optional)	Wireless Sound System

* Includes water and 2 adults weighing 175 lbs. each

** Requires a dedicated circuit supplied to the unit at all times. Electrical requirements will vary outside the U.S.

*** G.F.C.I. protected sub-panel required in 30amp conversion or 220v mode. Export models available in 230v, 50Hz, 1000w Heater

From the makers of

